

16ch対応
デジタルビデオレコーダー


CCE3RF81・CCE3RFF1

■設定ガイド (PDF版) について

設定ガイドも合わせてご確認ください。設定ガイドは、右記のQRコードまたはURLをご確認ください。
https://www.dxantenna.co.jp/product/item/ma_nuallmg/CCE3RF.pdf




■各部の名称

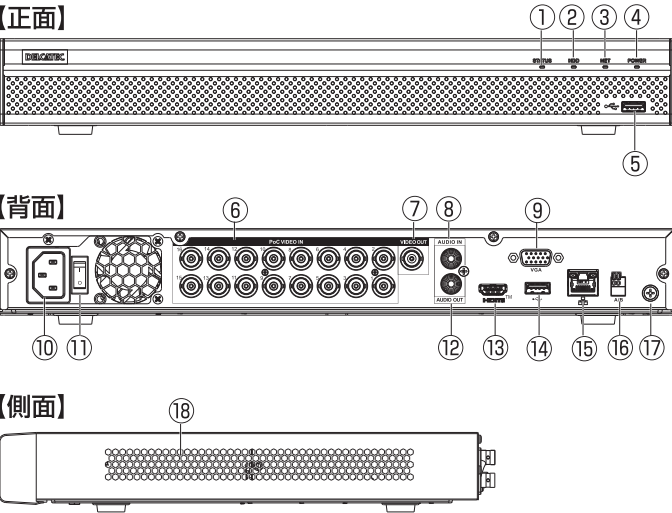

■接続のしかた (接続例)

本製品をモニターに接続して使用する

別売の CCE3C シリーズの同軸カメラに接続することで、カメラの映像を視聴したりや録画をすることができます。
カメラは本製品の VIDEO IN 端子に接続してください。
使用できる別売カメラについては、下記の URL または QR コードから、
本製品の詳細情報をご確認ください。
<https://dxantenna-product.dga.jp/list.html?page=1&category=83>

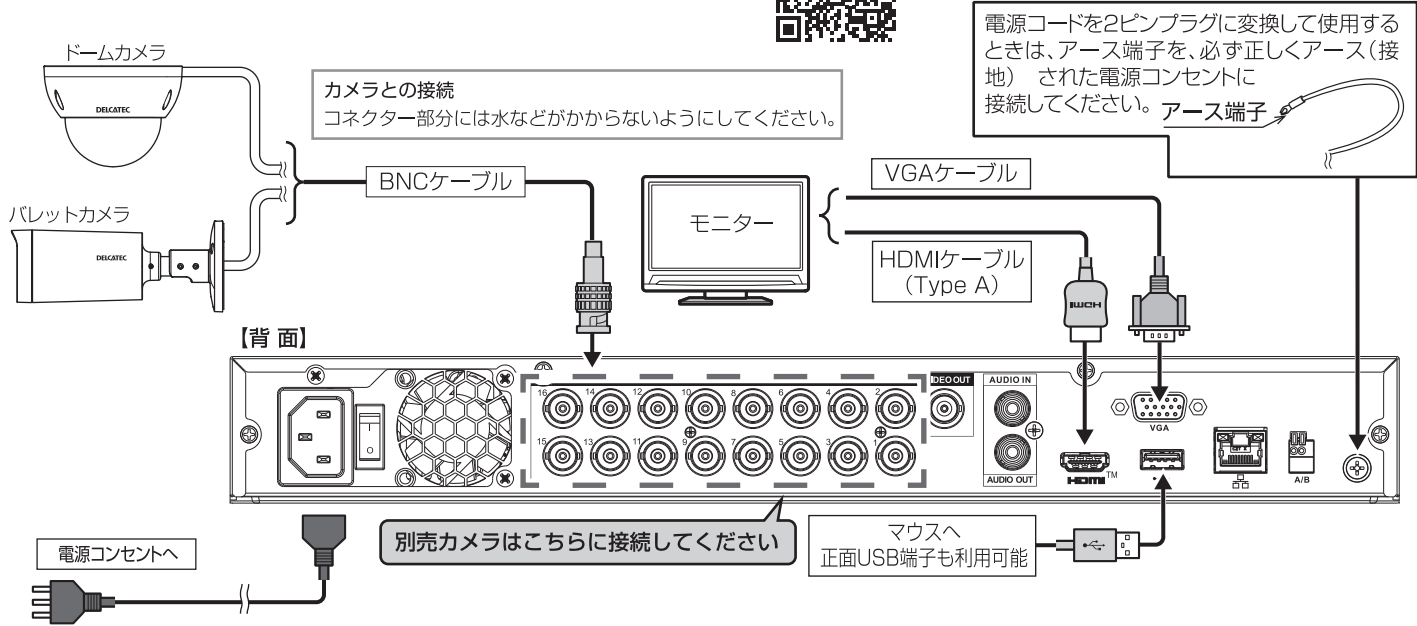

■付属品

- ・マウス ×1 個
- ・電源ケーブル ×1 本
- ・取扱説明書 ×1 部
- ・安全上のご注意 ×1 部

①	Status ランプ	点灯：正常に動作しています。
②	HDD ランプ	点灯：ハードディスクに異常があります。
③	NET ランプ	点灯：ネットワークに接続されていません。
④	POWER ランプ	点灯：正常に動作しています。
⑤	USB 端子	付属のマウス、または USB ストレージを接続します。
⑥	VIDEO IN 端子	PoC 給電に対応した端子です。同軸カメラを接続します。
⑦	VIDEO OUT 端子	同軸ケーブルを使用する映像出力端子です。
⑧	オーディオ入力	音声入力端子です。
⑨	VGA 出力端子	モニターと VGA 接続して本製品の管理画面を表示します。
⑩	電源端子	電源ケーブルを接続します。
⑪	電源スイッチ	電源のオン / オフを切り換えます。
⑫	オーディオ出力	音声出力端子です。
⑬	HDMI 出力端子	モニターと HDMI 接続して本製品の管理画面を表示します。
⑭	USB 端子	付属のマウス、または USB ストレージを接続します。
⑮	ネットワーク端子	LAN ケーブルを接続します。
⑯	RS-485 通信ポート	使用しません。
⑰	アース端子	アース線を接続します。
⑱	排気口	使用中はふさがらないでください。

本製品を管理用 PC に接続する

管理用 PC からカメラの映像を視聴したりや録画をすることができます。
※接続方法は「本製品をモニターに接続して使用する」を参考にしてください。
モニターを使用しないで、ネットワーク端子を使用することで、管理画面（WEB 管理画面）を使用できます。


- 本製品を管理用 PC に接続し、下記を参考に設定してください。
- 1 管理用 PC の IP アドレスを以下に設定します**
I P ア ド レ ス ： 192.168.1.1 ～ 192.168.1.255
（192.168.1.108以外）
サブネットマスク： 255.255.255.0

memo

- 本製品をPCと直接接続している場合に設定してください。
- 管理用PCのIPアドレス設定方法は、右記のQRコードまたはURLをご参照ください。
https://qa.dxantenna.co.jp/faq_detail.html?id=2478&category=&page=1


- 2 管理用 PC でウェブブラウザ（Google Chrome など）を開き、以下のページを表示します**
<http://192.168.1.108>

- 3 ログイン画面が表示されたら、ユーザー名とパスワードを入力します**
●ユーザー名・パスワードの入力を5回連続で間違えたときは、約5分間待ってから再度ログインしてください。

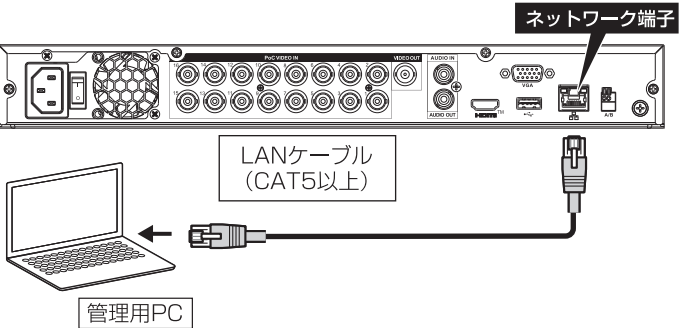

インターネット回線を使って接続するとき

「パスワード保護」の Email を受信したりすることができます。
ルーターなどDHCPサーバー機能がある機器を接続すると、「192.168.1.108」ではアクセスできなくなります。その場合は、本製品に割り振られているIPアドレスを入力してアクセスしてください。
本製品をDHCPサーバーに接続するときは、次ページの「■初期設定をする」の手順7をご確認ください。

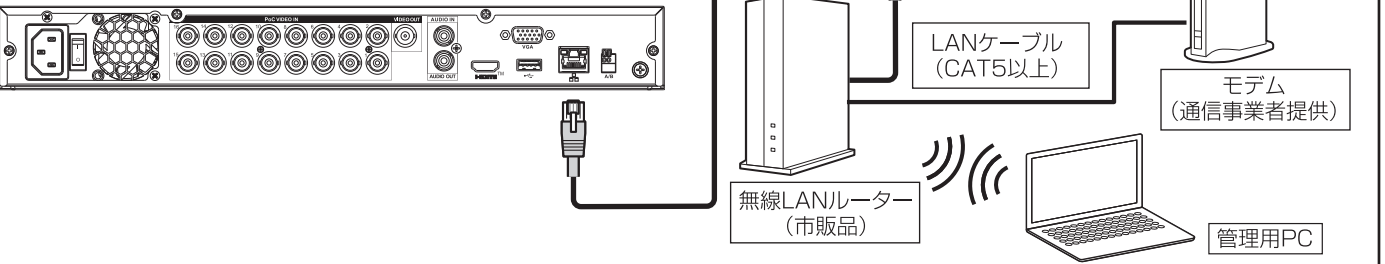


■電源を入れる・電源を切る


ケーブルが正しく接続され、装置が正しく設置されていることを確認します。
必ず付属の電源ケーブルを使用してください。
はじめて、本製品を使用するときは、初期設定を行ってください。

電源を入れる（起動する）

- ①電源端子に電源ケーブルを接続します。

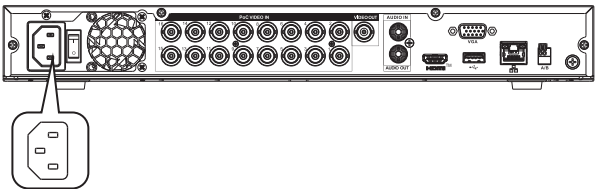


- ②電源スイッチを「I」の位置にします。

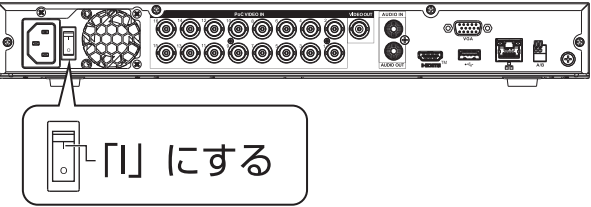

電源を切る（シャットダウンする）

- ①電源スイッチを「O」の位置にします。

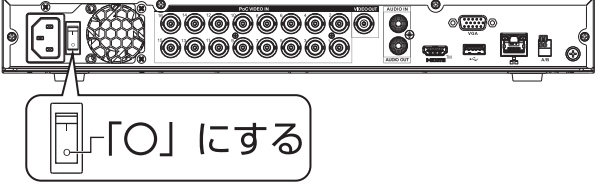

ご注意 ● 本製品を起動中またはシャットダウン中は電源ケーブルの抜き差しをしないでください。

■初期設定をする

はじめて、本製品を起動したときは、初期設定ウィザードが英語表記で表示されます。
本書は、初期設定に必要な項目のみ設定することを記載しています。
初期設定でスキップした項目は、初期設定完了後に、設定をすることができます。詳しい設定方法は、設定ガイドをご確認ください。
※設定が完了すると、次回以降、初期設定ウィザードは表示されません。

1. 一番上の「Region」のプルダウンメニューをクリックする

Region

Please select

クリックします

Language

English

Video Standard

PAL

Time Zone

(UTC+08:00)Beijing, Chongqing, Hong Kong...

System Time

20XX-XX-XX

12:34:56

DST

Type

Date

Week

Start Time

Jan

1

00:00

End Time

Jan

2

00:00

Online Update

2. プルダウンメニューから「Japan」を選択する 画面表示が日本語表示に切り換わります。

Region

Please select

ENG

Language

Iceland

Video Star

Italy

Time Zone

Jersey

ng, Hong Kong...

System Tir

Jamaica

DST

Jordan

Type

Japan

Start Time

Kenya

0

End Time

Kyrgystan

0

Online

Cambodia

3. 日本語表示に変更後、「次へ」をクリックする 本製品が再起動します。

設定を変更しないでください。

デバイス初期化

地域

日本

言語

日本語

ビデオ規格

NTSC

時間帯

(UTC+09:00) 大阪、札幌、東京

システム時刻

20XX-XX-XX

12:34:56

DST

タイプ

Date

Week

開始時刻

1月

1

00:00

終了時刻

1月

2

00:00

オンラインアップデート

次へ

初期設定時に、設定をする必要はありません。

クリック
します

4. 「パスワード」を設定する

- ・ユーザー名は初期値のadmin のままで、パスワードを設定します。
- ・「次へ」をクリックします。

デバイス初期化

1. パスワード入力

→

2. 解除パターン

→

3. パスワード保護

ユーザー

admin

① パスワード

パスワードは 8～32 文字にする必要があり、数字、大文字、小文字、特殊文字の 2 つ以上のカテゴリを含める必要があります (' ; : & などの文字は含めることはできません)。

② パスワード確認

パスワードアシスト

③ 解除パターン

「パスワードアシスト」は、初期設定時に設定をする必要はありません。

クリック
します

次へ

①	パスワード	パスワードを設定します。 ※ パスワードは数字・大文字・小文字・記号のうちいずれか2つを組み合わせた 8 ～ 32 文字で設定してください。 (" ' ; : & の記号は使用できません)
②	パスワード確認	確認のために新しく設定したパスワードを再度入力します。
③	解除パターン	「有効」(青色)にして解除パターンを設定できます。 (「無効」にして次の設定に進むこともできます)

本製品のユーザー名やパスワードを変更したときは、忘れないように下記のスペースをご利用ください。

ユーザー名

パスワード

5. 解除パターンを設定します。

(スキップして次の設定に進むことも可能です)
マウスでドラッグしながら、パターンを設定します。
確認のため同じパターンをもう一度入力します。

デバイス初期化

1. パスワード入力

→

2. 解除パターン

→

3. パスワード保護

パターン例

もう一度パターンを入力して下さい。

スキップ

設定をスキップすることができます。

6. メールアドレスを設定する

- ・パスワード解除に必要な仮パスワードの届くアドレスを指定します。
- ・後から設定する場合は、 に設定してください。

デバイス初期化

1. パスワード入力

→

2. 解除パターン

→

3. パスワード保護

メールアドレス

パスワードのリセットに使われています、早めに情報を補完することをお勧めします。

セキュリティ質問

質問 1

あなたの好きな子供の本は何ですか？

答え

質問 2

あなたの最初の上司の名前は何ですか？

答え

質問 3

あなたの好きな果物の名前は何ですか？

答え

クリック
します

次へ

「セキュリティ質問」は、初期設定時に設定をする必要はありません。 に設定し、「次へ」をクリックしてください。後から設定する場合は、設定ガイドを参照してください。

7. 「次へ」をクリックする

「1. ネットワーク」 ➡ 「2.P2P」 ➡ 「3. 録画」の設定画面に遷移しますので、「次へ」をクリックします。
設定ガイドを確認して、後から設定を行ってください。

DHCP サーバーを使用するときは にします。

スタートアップウィザード

1. ネットワーク

→

2. P2P

→

3. 録画

→

4. チャンネル

イーサネットカード

IPアドレス

ネットワーク

NIC メンバー

修正

解放

NIC1

xxxxxxxxxxxx

シングル NIC

1

IP アドレス : xxxxxxxxxxxx

デフォルトゲート : xxxxxxxxxxxx

MTU : xxxxx

MAC アドレス : xxxxxxxxxxxx

サブネットワーク : xxxxxxxxxxxx

モード : xx

IP バージョン

IPv4

DHCP

優先 DNS

8 . 8 . 8 . 8

オルタナート...

8 . 8 . 4 . 4

初期設定カード

NIC1

テスト

次へ

キャンセル

2.P2P

ステータス

オフライン

P2P クライアント

機器 SN

サンプル

サンプル

スキャンしてダウンロード...

クリック
します

戻る

次へ

キャンセル

3. 録画

初期設定

コピー先

戻る

次へ

キャンセル

クリック
します

8. ストレージを設定する

「4. チャンネル」の設定画面で、ハードディスク容量がいっぱいになったときの動作を設定します。
「▼」をクリックして、「読込 / 書込」を選択します。

読込 / 書込 : 日付の古いファイルから順に削除し、新しいデータを書き込みます。
読み取り専用 : 録画データの書き込みを停止します。

スタートアップウィザード

1. ネットワーク

→

2. P2P

→

3. 録画

→

4. チャンネル

1*

デバイス名

物理的な位置

プロパティ

ヘルスステータス

残容量 /

全て

1*

sda

ホスト_1

読込/書込

正常

1.23TB/

フォーマット

戻る

終了

チェックマーク
を入れます。
初期設定は終了です。
(再起動後、接続しているカメラの映像が表示されます)

memo

カメラ映像が表示されるまで少し時間がかかる場合があります。

■録画データを再生する

右クリックして表示する

「検索」をクリックする

メインメニュー

検索

PTZ コントロール

ビュー 1

ビュー 4

ビュー 8

ビュー 9

ビュー 16

AI ディスプレイ

シーケンス

前画面

次画面

手動コントロール

画像

イメージ

下記は基本的な再生方法を記載しています。そのほかの再生方法については、設定ガイドをご確認ください。

①

1月

12:34:56

Channel1

Channel2

Channel3

Channel4

Channel5

Channel6

Channel7

Channel8

Channel9

Channel10

Channel11

Channel12

Channel13

Channel14

Channel15

Channel16

Channel17

Channel18

Channel19

Channel20

Channel21

Channel22

Channel23

Channel24

Channel25

Channel26

Channel27

Channel28

Channel29

Channel30

Channel31

Channel32

Channel33

Channel34

Channel35

Channel36

Channel37

Channel38

Channel39

Channel40

Channel41

Channel42

Channel43

Channel44

Channel45

Channel46

Channel47

Channel48

Channel49

Channel50

Channel51

Channel52

Channel53

Channel54

Channel55

Channel56

Channel57

Channel58

Channel59

Channel60

Channel61

Channel62

Channel63

Channel64

Channel65

Channel66

Channel67

Channel68

Channel69

Channel70

Channel71

Channel72

Channel73

Channel74

Channel75

Channel76

Channel77

Channel78

Channel79

Channel80

Channel81

Channel82

Channel83

Channel84

Channel85

Channel86

Channel87

Channel88

Channel89

Channel90

Channel91

Channel92

Channel93

Channel94

Channel95

Channel96

Channel97

Channel98

Channel99

Channel100

Channel101

Channel102

Channel103

Channel104

Channel105

Channel106

Channel107

Channel108

Channel109

Channel110

Channel111

Channel112

Channel113

Channel114

Channel115

Channel116

Channel117

Channel118

Channel119

Channel120

Channel121

Channel122

Channel123

Channel124

Channel125

Channel126

Channel127

Channel128

Channel129

Channel130

Channel131

Channel132

Channel133

Channel134

Channel135

Channel136

Channel137

Channel138

Channel139

Channel140

Channel141

Channel142

Channel143

Channel144

Channel145

Channel146

Channel147

Channel148

Channel149

Channel150

Channel151

Channel152

Channel153

Channel154

Channel155

Channel156

Channel157

Channel158

Channel159

Channel160

Channel161

Channel162

Channel163

Channel164

Channel165

Channel166

Channel167

Channel168

Channel169

Channel170

Channel171

Channel172

Channel173

Channel174

Channel175

Channel176

Channel177

Channel178

Channel179

Channel180

Channel181

Channel182

Channel183

Channel184

Channel185

Channel186

Channel187

Channel188

Channel189

Channel190

Channel191

Channel192

Channel193

Channel194

Channel195

Channel196

Channel197

Channel198

Channel199

Channel200

Channel201

Channel202

Channel203

Channel204

Channel205

Channel206

Channel207

Channel208

Channel209

Channel210

Channel211

Channel212

Channel213

Channel214

Channel215

Channel216

Channel217

Channel218

Channel219

Channel220

Channel221

Channel222

Channel223

Channel224

Channel225

Channel226

Channel227

Channel228

Channel229

Channel230

Channel231

Channel232

Channel233

Channel234

Channel235

Channel236

Channel237

Channel238

Channel239

Channel240

Channel241

Channel242

Channel243

Channel244

Channel245

Channel246

Channel247

Channel248

Channel249

Channel250

Channel251

Channel252

Channel253

Channel254

Channel255

Channel256

Channel257

Channel258

Channel259

Channel260

Channel261

Channel262

Channel263

Channel264

Channel265

Channel266

Channel267

Channel268

Channel269

Channel270

Channel271

Channel272

Channel273

Channel274

Channel275

Channel276

Channel277

Channel278

Channel279

Channel280

Channel281

Channel282

Channel283

Channel284

Channel285

Channel286

Channel287

Channel288

Channel289

Channel290

Channel291

Channel292

Channel293

Channel294

Channel295

Channel296

Channel297

Channel298

Channel299

Channel300

Channel301

Channel302

Channel303

Channel304

Channel305

Channel306

Channel307

Channel308

Channel309

Channel310

Channel311

Channel312

Channel313

Channel314

Channel315

Channel316

Channel317

Channel318

Channel319

Channel320

Channel321

Channel322

Channel323

Channel324

Channel325

Channel326

Channel327

Channel328

Channel329

Channel330

Channel331

Channel332

Channel333

Channel334

Channel335

Channel336

Channel337

Channel338

Channel339

Channel340

Channel341

Channel342

Channel343

Channel344

Channel345

Channel346

Channel347

Channel348

Channel349

Channel350

Channel351

Channel352

Channel353

Channel354

Channel355

Channel356

Channel357

Channel358

Channel359

Channel360

Channel361

Channel362

Channel363

Channel364

Channel365

Channel366

Channel367

Channel368

Channel369

Channel370

Channel371

Channel372

Channel373

Channel374

Channel375

Channel376

Channel377

Channel378

Channel379

Channel380

Channel381

Channel382

Channel383

Channel384

Channel385

Channel386

Channel387

Channel388

Channel389

Channel390

Channel391

Channel392

Channel393

Channel394

Channel395

Channel396

Channel397

Channel398

Channel399

Channel400

Channel401

Channel402

Channel403

Channel404

Channel405

Channel406

Channel407

Channel408

Channel409

Channel410

Channel411

Channel412

Channel413

Channel414

Channel415

Channel416

Channel417

Channel418

Channel419

Channel420

Channel421

Channel422

Channel423

Channel424

Channel425

Channel426

Channel427

Channel428

Channel429

Channel430

Channel431

Channel432

Channel433

Channel434

Channel435

Channel436

Channel437

Channel438

Channel439

Channel440

Channel441

Channel442

Channel443

Channel444

Channel445

Channel446

Channel447

Channel448

Channel449

Channel450

Channel451

Channel452

Channel453

Channel454

Channel455

Channel456

Channel457

Channel458

Channel459

Channel460

Channel461

Channel462

Channel463

Channel464

Channel465

Channel466

Channel467

Channel468

Channel469

Channel470

Channel471

Channel472

Channel473

Channel474

Channel475

Channel476

Channel477

Channel478

Channel479

Channel480

Channel481

Channel482

Channel483

Channel484

Channel485

Channel486

Channel487

Channel488

Channel489

Channel490

Channel491

Channel492

Channel493

Channel494

Channel495

Channel496

Channel497

Channel498

Channel499

Channel500

Channel501

Channel502

Channel503

Channel504

Channel505

Channel506

Channel507

Channel508

Channel509

Channel510

Channel511

Channel512

Channel513

Channel514

Channel515

Channel516

Channel517

Channel518

Channel519

Channel520

Channel521

Channel522

Channel523

Channel524

Channel525

Channel526

Channel527

Channel528

Channel529

Channel530

Channel531

Channel532

Channel533

Channel534

Channel535

Channel536

Channel537

Channel538

Channel539

Channel540

Channel541

Channel542

Channel543

Channel544

Channel545

Channel546

Channel547

Channel548

Channel549

Channel550

Channel551

Channel552

Channel553

Channel554

Channel555

Channel556

Channel557

Channel558

Channel559

Channel560

Channel561

Channel562

Channel563

Channel564

Channel565

Channel566

Channel567

Channel568

Channel569

Channel570

Channel571

Channel572

Channel573

Channel574

Channel575

Channel576

Channel577

Channel578

Channel579

Channel580

Channel581

Channel582

Channel583

Channel584

Channel585

Channel586

Channel587

Channel588

Channel589

Channel590

Channel591

Channel592

Channel593

Channel594

Channel595

Channel596

Channel597

Channel598

Channel599

Channel600

Channel601

Channel602

Channel603

Channel604

Channel605

Channel606

Channel607

Channel608

Channel609

Channel610

Channel611

Channel612

Channel613

Channel614

Channel615

Channel616

Channel617

Channel618

Channel619

Channel620

Channel621

Channel622

Channel623

Channel624

Channel625

Channel626

Channel627

Channel628

Channel629

Channel630

Channel631

Channel632

Channel633

Channel634

Channel635

Channel636

Channel637

Channel638

Channel639

Channel640

Channel641

Channel642

Channel643

Channel644

Channel645

Channel646

Channel647

Channel648

Channel649

Channel650

Channel651

Channel652

Channel653

Channel654

Channel655

Channel656

Channel657

Channel658

Channel659

Channel660

Channel661

Channel662

Channel663

Channel664

Channel665

Channel666

Channel667

Channel668

Channel669

Channel670

Channel671

Channel672

Channel673

Channel674

Channel675

Channel676

Channel677

Channel678

Channel679

Channel680

Channel681

Channel682

Channel683

Channel684

Channel685

Channel686

Channel687

Channel688

Channel689

Channel690

Channel691

Channel692

Channel693

Channel694

Channel695

Channel696

Channel697

Channel698

Channel699

Channel700

Channel701

Channel702

Channel703

Channel704

Channel705

Channel706

Channel707

Channel708

Channel709

Channel710

Channel711

Channel712

Channel713

Channel714

Channel715

Channel716

Channel717

Channel718

Channel719

Channel720

Channel721

Channel722

Channel723

Channel724

Channel725

Channel726

Channel727

Channel728

Channel729

Channel730

Channel731

Channel732

Channel733

Channel734

Channel735

Channel736

Channel737

Channel738

Channel739

Channel740

Channel741

Channel742

Channel743

Channel744

Channel745

Channel746

Channel747

Channel748

Channel749

Channel750

Channel751

Channel752

Channel753

Channel754

Channel755

Channel756

Channel757

Channel758

Channel759

Channel760

Channel761

Channel762

Channel763

Channel764

Channel765

Channel766

Channel767

Channel768

Channel769

Channel770

Channel771

Channel772

Channel773

Channel774

Channel775

Channel776

Channel777

Channel778

Channel779

Channel780

Channel781

Channel782

Channel783

Channel784

Channel785

Channel786

Channel787

Channel788

Channel789

Channel790

Channel791

Channel792

Channel793

Channel794

Channel795

Channel796

Channel797

Channel798

Channel799

Channel800

Channel801

Channel802

Channel803

Channel804

Channel805

Channel806

Channel807

Channel808

Channel809

Channel810

Channel811

Channel812

Channel813

Channel814

Channel815

Channel816

Channel817

Channel818

Channel819

Channel820

Channel821

Channel822

Channel823

Channel824

Channel825

Channel826

Channel827

Channel828

Channel829

Channel830

Channel831

Channel832

Channel833

Channel834

Channel835

Channel836

Channel837

Channel838

Channel839

Channel840

Channel841

Channel842

Channel843

Channel844

Channel845

Channel846

Channel847

Channel848

Channel849

Channel850

Channel851

Channel852

Channel853

Channel854

Channel855

Channel856

Channel857

Channel858

Channel859

Channel860

Channel861

Channel862

Channel863

Channel864

Channel865

Channel866

Channel867

Channel868

Channel869

Channel870

Channel871

Channel872

Channel873

Channel874

Channel875

Channel876

Channel877

Channel878

Channel879

Channel880

Channel881

Channel882

Channel883

Channel884

Channel885

Channel886

Channel887

Channel888

Channel889

Channel890

Channel891

Channel892

Channel893

Channel894

Channel895

Channel896

Channel897

Channel898

Channel899

Channel900

Channel901

Channel902

Channel903

Channel